

Horizontal End-Suction Pumps


SBA1600S...2000S

Axial/semi-open impellers



60 Hz

SBA1600S...2000S

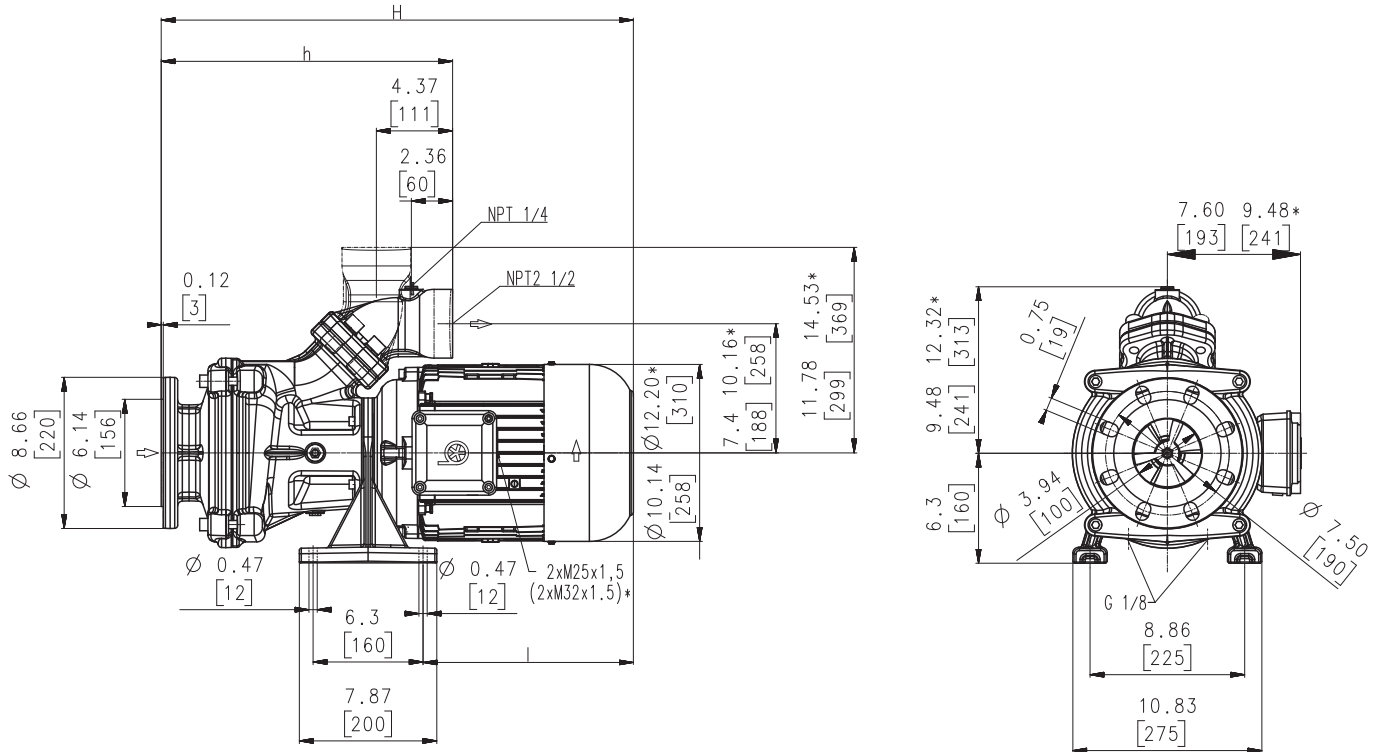

Dimensions in Inches / mm
 *) Dimensions SBA2000S

Type	Flow at head	Dimensions		Length		Weight		Power	Voltage 3~	Fre- quen- cy	Current	Speed		
	GPM /Feet l/min /m	H inch	H mm	h inch	h mm	l Inch	l mm						Lbs	kg
SBA1600S	350/60	31.2	793	16.7	424	16.3	414	265	120	13.8	230	60	31.6	3550
	1400/17									10.3	460	60	15.8	3550
SBA2000S	400/70	31.6	802	19.5	495	16.6	422	324	147	16.9	230	60	39.2	3560
	1600/20									12.6	460	60	19.6	3560



Horizontal End-Suction Pumps

are centrifugal inline pumps with a compact design where the impeller is mounted onto the extended motor shaft. These pumps are not self-priming and must be gravity fed. All pumps are equipped with a single mechanical seal. Upon request a second mechanical seal is available to allow for dry-running (-GD). This pump series is designed for horizontal installations next to a tank and for pumping **air entrained coolant** fluids, such as **water-soluble coolants or cutting oils**, as they occur in **high speed turning, milling or grinding applications**. The SBA pumps are equipped with the user-friendly 45 degree **flange** connection which allows for either vertical or horizontal pipe connection and the connection of a pressure gauge with NPT 1/4. For more information see mechanical features within the technical information section.

Applications

- Types of fluid
 - coolants
 - cooling/cutting oils
- Kinematic viscosity
 - ...200 SSU (...45 mm²/s)
- Pumping temperature
 - 30...175 °F (0...80 °C)

Construction

Pump body	cast iron
Cover	cast iron
Impeller axial	cast steel
Impeller radial	cast steel
Shaft	steel
Mechanical seal	SiC
Noise level (Motor only; Tolerance +3 dBA)	
SBA1600S	78 dBA
SBA2000S	79 dBA

